

SAFETY RELIEF VALVES

CHECK VALVES

CONDENSATE RELIEF VALVES

CONTROL VALVES

SOLENOID VALVES


COMPRESSED AIR Applications



FLOORCARE
Applications



**STEAM
STERILIZER**
Applications



LIFT & HOIST
Applications

SAFETY RELIEF VALVES

Pressure Relief Valves are used to protect systems from over pressurization. Kingston Valves offers safety valves for air, gas, steam and liquid applications. Our safety valves are used on compressed air systems, air dryers, air tanks, steam sertilizers, boilers and other related applications.

ASME CODE VALVES



KSV10/25/30/35/40

Sizes:
1/8" to 1-1/4"
Pressure Range:
20-450 PSI
Available in:
Brass, Stainless Steel
Soft Seat



112CSS/CR

Sizes:
1/4", 3/8", 1/2"
Pressure Range:
25-300 PSI*
Available in:
Brass, Stainless Steel
Hard Seat



115/115CR

Sizes:
1/4", 3/8", 1/2"
Pressure Range:
25-300 PSI*
Available in:
Brass, Stainless Steel
Soft Seat



118CSS

Sizes:
1/4" to 1"
Pressure Range:
25-300 PSI
Hard Seat



119CSS

Sizes:
1/4" to 1"
Pressure Range:
25-300 PSI
Hard Seat



110C

Sizes:
1/4", 3/8"
Pressure Range:
25-600 PSI
Hard Seat



114

Sizes:
1/4", to 1"
Pressure Range:
25-300 PSI*
Soft Seat



710D

Sizes:
1/4" to 1"
Pressure Range:
15-400 PSI
Soft Seat

* = Steam Rated Service 35 to 50PSI | Contact Kingston for more Information

NON CODE VALVES



128A/130

Sizes:
1/8", 1/4"
Pressure:
Max 300 PSI
Soft Seat



111X

Sizes:
1/4"
Pressure:
Max 400 PSI
-250° to 300°F
Soft Seat



100SS

Sizes:
1/8" to 1/2"
Pressure:
Max 300 PSI
Hard Seat



103/SS/H/D/120

Sizes:
1/4" to 3/4"
Pressure Range:
5-1000 PSI

KINGSTON KNG Series Safety Valves

ASME Code Sections I & VIII, for air, gas, steam and liquid applications. Available in bronze, carbon steel, and stainless steel construction with a variety of seat materials available. 1/2" to 2-1/2" inlet and D to J orifice sizes.

Refer to KNG Catalog for more information.



CHECK VALVES

Kingston Check Valves are largely used on compressed air systems, air dryers, and other related compressed or liquid applications to prevent back pressure/flow.



KCV234

Sizes:
3/8" to 1-1/4"
Pressure:
Max 400 PSI



226/226A/226T

Sizes:
1/4" to 3/4"
Pressure:
Max 400 PSI



215A

Sizes:
1/4", 3/8", 1/2"
Pressure:
Max 400 PSI



ANTI-HAMMER

205

Sizes:
3/8" to 2"
Pressure:
Max 400 PSI



227

Sizes:
1/4"
Pressure:
Max 300 PSI

CONDENSATE DRAIN VALVES



**KTD-S-B-24
(Dual Inlet)**
1/4" NPTF
1/2" NPTM
Pressure:
Max 300 PSI
CALUS



KTD-B-04 (1/2")
KTD-B-02 (1/4")
Pressure:
Max 230 PSI
CALUS




KTD Strainer
1/4" KTD-S-02
1/2" KTD-S-04
Pressure:
Max 300 PSI



620
Sizes:
3/8"
Pressure:
Max 400 PSI

BALL VALVES (KBV)

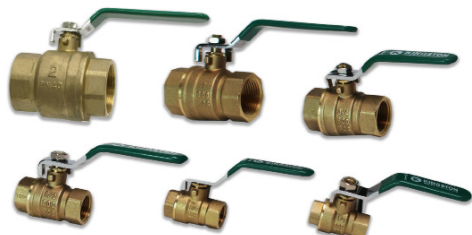

Full Port Brass Female to Female Design
600 W.O.G. 150 WSP rating
For use with Air, Water, Oil or Inert Gases
Available in: 1/4", 3/8", 1/2", 3/4", 1", 1 1/4",
1 1/2", 2", NPT

MINI BALL VALVES (KMBV)



Chrome Plated Ball. Full Port Design.
Max Operating Pressure 400 W.O.G.
Available in 1/8", 1/4", 3/8", 1/2"
FxF, FxM, MNPT x Barb construction.
Special Configurations Available Upon Request.

SOLENOID VALVE (KN)



The Internally Piloted Industrial Solenoid Valves (KN) are used for carwash and reclaimed water systems, and agricultural and municipal water applications.

CONTROL VALVES

Kingston Control Valves are used for air, gas, steam, and liquid applications. Our Control Valves are used in air dryers, nitrogen generators, agricultural sprayers, inground lifts, car wash systems, floorcare and upholstery cleaning wands, and other related applications.

KINGSTON PNEUMATIC ANGLE SEAT VALVE (KAV)

Sizes: 3/8" to 2-1/2"
Operating Pressure: up to 232 PSI
Temperature: -20°F to 400°F

The externally piloted angle seat valve is operated with a single or double-acting piston actuator. Available in three different materials. Achieves high flow rates and minimizes pressure drop through the valve.



292
Sizes:
1/4"
Pressure:
Max 150 PSI



296
Sizes: 1/4"
Pressure:
Max 150 PSI

Pilot Actuators



329
Sizes: 1/8"
Pressure:
Max 125 PSI



331
Sizes: 1/4"
Pressure:
Max 100 PSI



**253/254
/ 258/259**
Sizes: 1/4"
Pressure:
Max 350 PSI



251FT/251-30
Sizes:
1/4"
Pressure:
Max 1200 PSI



167
Sizes: 1/8"
Pressure:
Max 500 PSI



621 Unloader
Sizes:
1/2", 1"
Pressure:
Max 300 PSI



305A/305B
Sizes:
1/4" to 1-1/4"
Pressure:
Max 400 PSI



302/303
Sizes:
1/2"
Pressure:
Max 200 PSI



301AC
Sizes:
1/4"
Pressure:
Max 200 PSI



294/298
Sizes:
1/4"
Pressure:
Max 150 PSI

