

HLT Lifts

Vertical positioning for HMIs

- Strong & robust
- Flexible configuration
- Excellent value
- In Stock



Automatic blocking of vertical stroke possible in each position.

Continuously adjustable lift for control housing and HMIs.

Weight range from 5-60 kg (11-132 lbs) available


häwa HLT type lifts

strong, continuously adjustable lift system for vertical positioning



DON'T FIND THE CONFIGURATION YOU NEED? PLEASE CONTACT HAEWA FOR ANY MODIFICATION	Configuration	Order No.	Lift Connection Tube	Weight Range	Catalog
OR CUSTOMIZATION AT 1-800-783-4239					Page #
		7595-7601-13-01		13 - 21 kg / 28.5 - 46 lbs	
HLT Lift S	Standard hanging	7595-7601-14-01	65 mm	18 - 28 kg / 40 - 61.5 lbs	6
		7595-7601-15-01		26 - 37 kg / 57 - 81.5 lbs	

Other configurations, connection tubes and weight ranges are available. Please contact Haewa customer service for support at 1-800-783-4239 or info@ haewa.com.

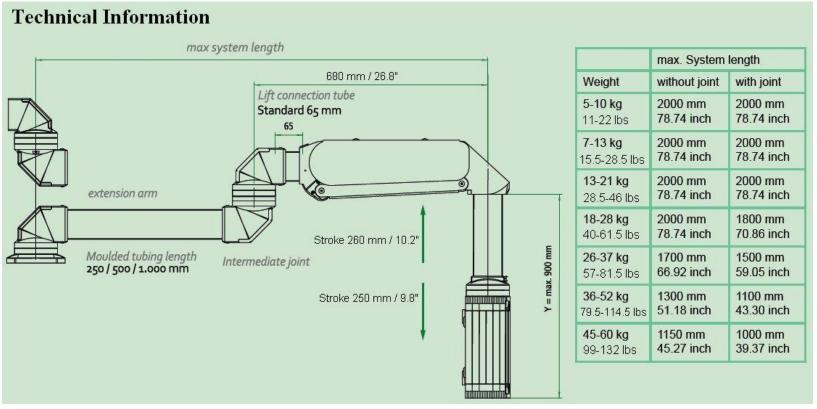

Configuration Table	Choose length of lift connection tube	Choose your loading capacity:
	1 = 65 mm Standard	1 = 5-10 kg
Choose your design:	2 = 100 mm	2 = 7-13 kg
1 = Standard hanging	3 = 200 mm	3 = 13-21 kg
2 = Desk mounting	4 = 300 mm	4 = 18-28 kg
3 = Standard hanging; stroke limiter	5 = 400 mm	5 = 26-37 kg
4 = Desk mounting; stroke limiter	6 = 500 mm	6 = 36-52 kg
e.g. 7595-760 1 -xx-01	e.g. 7595-7601- 1 x-01	7 = 45-60 kg
		e.g. 7595-7601-1 1 -01

Scope of supply:

- Lift with lift connection tube